

HLA50-255/4+0 S

- Lightning impulse current arresters type T1 ensure the equipotential bonding and eliminate the effects of lightning current in single-phase and three-phase power supply systems.
 - Products contain multiple non-exhausting spark gaps, thanks to which they are able to discharge the highest lightning impulse current.
 - Suitable for objects with considerable levels of protection LPL I and LPL II, such as big industrial complexes and properties of particular importance – hospitals, banks, power plants.
- Installed as close as possible the overhead line enters the building i.e. the electric power substation, electrometer or the main distribution boards.
 - If the product contains two PE (or PEN) terminals, it must not be used as a PE (PEN) bridge.
 - **LED** indication specifies a version with LED fault signalisation.
 - **S** indication specifies a version with remote monitoring and LED fault signalisation.

Type		HLA50-255/4+0 S
Test class according to EN 61643-11:2012 (IEC 61643-11:2011)		T1
System		TN-S
Number of poles		4
Rated operating AC voltage	U _N	230 V
Maximum continuous operating voltage AC	U _C	255 V
Impulse discharge current for class I test (10/350)	I _{imp}	50 kA
Charge	Q	25 As
Specific energy for class I test	W/R	625 kJ/Ω
Total discharge current (10/350) L1+L2+L3+N->PE	I _{Total}	200 kA
Nominal discharge current for class II test (8/20)	I _n	50 kA
Voltage protection level at I _{imp}	U _p	< 2 kV
Temporary overvoltage test (TOV) for t _T = 5 s	U _T	337 V
Temporary overvoltage test (TOV) for t _T = 120 min	U _T	440 V
Response time	t _A	< 100 ns
Maximal back-up fuse		500 A gL/gG
Short-circuit current rating at maximum back-up fuse	I _{SCCR}	25 kA _{rms}
Follow current interrupt rating	I _{fi}	25 kA _{rms}
Lightning protection zone		LPZ 0-1, LPZ 1-2
Housing material		Polyamid PA6, UL94 V-0
Degree of protection		IP20
Operating temperature	θ	-40 ÷ 70 °C
Humidity range	RH	5 ÷ 95 %
Minimum cross-section of connected Cu conductors accord. to HD 60364-5-53:2022 (doesn't apply to „V“ connection) for T1	S	6 mm ² (L, N) 16 mm ² (PE, PEN)
Clamp fastening range (solid conductor)		2.5 ÷ 25 mm ²
Clamp fastening range (stranded conductor)		2.5 ÷ 16 mm ²
Tightening moment		4 Nm
Installation		On DIN rail 35 mm

Type		HLA50-255/4+0 S
Modular width		8 TE
Operating position		Any
Product placement environment		Internal
Signalling at the device		Optic
Importance of local signaling		OK – green light on FAULT – red light on
Remote signalling		Yes
Potential free signal contact (S) (recommended cross-section of remote monitoring max. 1 mm ²)		AC: 250 V / 0.5 A, DC: 250 V / 0.1 A
Pluggable version		No
Lifetime		> 100 000 h
Designed according to standards		
Requirements and test methods for SPDs connected to low-voltage power systems		IEC 61643-11:2011
Safety of Flammability of Plastic Materials		UL 94
Application standards		
Protection against lightning		IEC 62305:2010
Selection and erection of electrical equipment – Switchgear and controlgear		HD 60364-5-53:2022
Selection and application principles for SPDs connected to low-voltage power systems		CLC/TS 61643-12:2009
Ordering, packaging and additional data		
Mass	m	980 g
Mass (including the packaging)	m	1.024 kg
Packaging dimensions (H x W x D)		71 x 177 x 106 mm
Packaging value	V	1.33 dm ³
ETIM group		EG000021
ETIM class		EC000381
Customs tariff no.		85363010
EAN code		8590681114858
Art. number		10 978




The link in the QR code leads to the online presentation of the HLA50-255/4+0 S. There, in addition to the always up-to-date data sheet, you will also find all diagrams and drawings, declarations of conformity, or 2D or 3D models and other necessary materials. For more information, visit www.hakil.com



8590681114858

Application wiring diagram (installation)

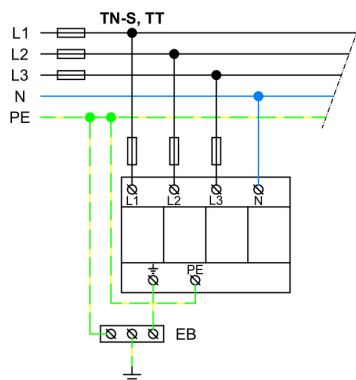

Internal diagram

