

HLSA25G-255/3+0

- Lightning impulse current and surge arresters type T1+T2+T3.
  - The products consist of varistors with big discharge ability.
  - HLSA25 in configurations 1+1, 3+1 and HLSA25G are additionally combined with a gas discharge tube which ensures zero leakage current through the PE conductor.
  - Suitable for objects with considerable levels of protection LPL I and LPL II.
  - Installed at the boundaries of LPZ 0 – LPZ 1 and higher zones, closest to where overhead line enters the building i.e. in the main distribution boards.
- In case of the installation of a type T1+T2+T3 in the main switchboard, it is also necessary to install type T2 and T3 in any additional distribution boards in the electrical installation.
  - If the product contains two PE (or PEN) terminals, it must not be used as a PE (PEN) bridge.
  - **S** indication specifies a version with remote monitoring.

Type		HLSA25G-255/3+0
Test class according to EN 61643-11:2012 (IEC 61643-11:2011)		T1, T2, T3
System		TN-C
Number of poles		3
Rated operating AC voltage	U <sub>N</sub>	230 V
Maximum continuous operating voltage AC	U <sub>C</sub>	255 V
Rated load current for „V“ connection	I <sub>L</sub>	125 A
Maximum discharge current (8/20)	I <sub>max</sub>	50 kA
Impulse discharge current for class I test (10/350)	I <sub>imp</sub>	25 kA
Charge	Q	12.5 As
Specific energy for class I test	W/R	156 kJ/Ω
Total discharge current (10/350) L1+L2+L3->PEN	I <sub>Total</sub>	75 kA
Total discharge current (8/20) L1+L2+L3->PEN	I <sub>Total</sub>	150 kA
Nominal discharge current for class II test (8/20)	I <sub>n</sub>	25 kA
Open circuit voltage of the combination wave generator	U <sub>OC</sub>	6 kV
Voltage protection level at I <sub>n</sub>	U <sub>p</sub>	< 1.25 kV
Temporary overvoltage test (TOV) for t <sub>T</sub> = 5 s	U <sub>T</sub>	337 V
Temporary overvoltage test (TOV) for t <sub>T</sub> = 120 min	U <sub>T</sub>	440 V
Response time	t <sub>A</sub>	< 100 ns
Maximal back-up fuse		250 A gL/gG
Maximal back-up fuse („V“ connection)		125 A gL/gG
Residual current	I <sub>PE</sub>	≤ 5 μA
Short-circuit current rating at maximum back-up fuse	I <sub>SCCR</sub>	80 kA <sub>rms</sub>
Lightning protection zone		LPZ 0-1, LPZ 1-2, LPZ 2-3
Housing material		Polyamid PA6, UL94 V-0
Degree of protection		IP20
Operating temperature	θ	-40 ÷ 70 °C
Humidity range	RH	5 ÷ 95 %

Type		HLSA25G-255/3+0
Minimum cross-section of connected Cu conductors accord. to HD 60364-5-53:2022 (doesn't apply to „V“ connection) for T1	S	6 mm <sup>2</sup> (L, N) 16 mm <sup>2</sup> (PE, PEN)
Minimum cross-section of connected Cu conductors accord. to HD 60364-5-53:2022 (doesn't apply to „V“ connection) for T2	S	2.5 mm <sup>2</sup> (L, N) 6 mm <sup>2</sup> (PE, PEN)
Clamp fastening range (solid conductor)		2.5 ÷ 35 mm <sup>2</sup>
Clamp fastening range (stranded conductor)		2.5 ÷ 25 mm <sup>2</sup>
Tightening moment		3 Nm
Installation		On DIN rail 35 mm
Modular width		6 TE
Operating position		Any
Product placement environment		Internal
Signalling at the device		Optic
Importance of local signaling		OK – clear target FAULT – red target
Remote signalling		No
Pluggable version		No
Lifetime		> 100 000 h
<b>Designed according to standards</b>		
Requirements and test methods for SPDs connected to low-voltage power systems		IEC 61643-11:2011
Safety of Flammability of Plastic Materials		UL 94
<b>Application standards</b>		
Protection against lightning		IEC 62305:2010
Selection and erection of electrical equipment – Switchgear and controlgear		HD 60364-5-53:2022
Selection and application principles for SPDs connected to low-voltage power systems		CLC/TS 61643-12:2009
<b>Ordering, packaging and additional data</b>		
Mass	m	780 g
Mass (including the packaging)	m	824 g
Packaging dimensions (H x W x D)		71 x 177 x 106 mm
Packaging value	V	1.33 dm <sup>3</sup>
ETIM group		EG000021
ETIM class		EC001457
Customs tariff no.		85363010
EAN code		8590681114292
<b>Art. number</b>		<b>10 464</b>




The link in the QR code leads to the online presentation of the **HLSA25G-255/3+0**. There, in addition to the always up-to-date data sheet, you will also find all diagrams and drawings, declarations of conformity, or 2D or 3D models and other necessary materials. For more information, visit [www.hakil.com](http://www.hakil.com)



8590681114292

Application wiring diagram (installation)

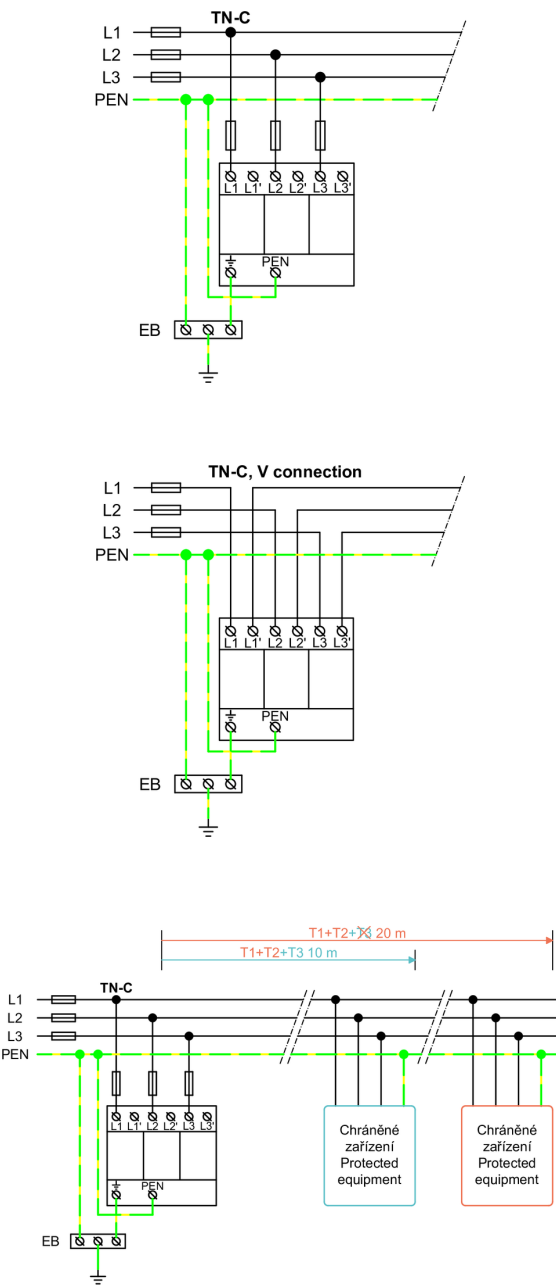

Internal diagram

