

**LED 650nm**


**1 General**

This active component is especially suited for applications with standard 1mm plastic optical fiber. Pre-mounted with a fast 650nm LED capable of high optical output power, the component is a good solution in optical data transmission systems with plastic optical fibers.

**2 Applications**

Due to the good optical and mechanical features this transmitter may be used in many applications:

- Optical networks
- Industrial electronic
- Power electronic

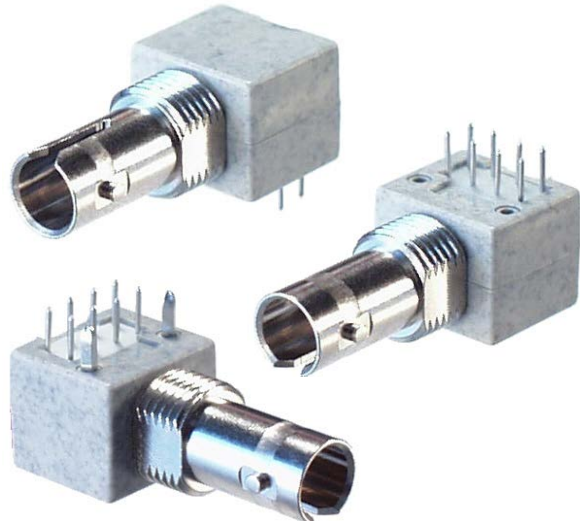

Pic. 1 650nm LED

**3 Ordering Information**

Style	Part Number
F-ST without fixing pins	905SE650ST001
F-ST with fixing pins	905SE650ST002

**4 Features**

- 650nm LED
- F-ST port (metal)
- Qualified for plastic and PCF fiber
- Plastic case
- Optional with fixing pins
- Pick and place support
- Wave soldering compatible

**5 Technical Drawing**

**Case**

**PCB hole pattern**

View: Component Side  
 Drill diameters:  
 PIN 1..8 = 0.8mm  
 Fixing Pins A (option) = 1.4mm

**Symbol**

**Pinout**

PIN Nr.	Funktion
3	Cathode
2	Anode
1, 4, 5, 6, 7, 8	NC

Pic 2 Case drawing

## LED 650nm

### 6 Maximum Ratings \_\_\_\_\_

Stresses beyond those listed under 'Maximum Ratings' may cause permanent damage to the device. Listed values are stress limits only and functional operation of the device at these conditions is not recommended. Exposure to maximum rating conditions for extended periods may affect the device reliability.

Parameter	Value	Unit
Operating temperature range	-40 ... +85	°C
Storage temperature range	-40 ... +100	°C
Junction temperature	100	°C
Soldering temperature 2mm from case bottom, t ≤ 5s	260	°C
Reverse voltage	3	V
Forward current	50	mA
Power dissipation	120	mW
Thermal resistance (Junction/Air)	450	K/W

### 7 Technical Data (T<sub>A</sub> = 40°C bis +85°C) \_\_\_\_\_

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage	V <sub>F</sub>	I <sub>LED_DC</sub> = 50mA, T <sub>A</sub> =25°C		2.0	2.6	V
Optical output power	P <sub>OPT</sub>	I <sub>LED_DC</sub> = 10mA, T <sub>A</sub> =25°C, Wert <sub>dBm</sub> = 10*log(Wert <sub>meas</sub> /1mW), 1mm POF, Länge 1m, NA=0.5	-10.5	-6.2	-2.5	dBm
Peak wavelength	λ <sub>P</sub>		630	650	685	nm
Spectral bandwidth	Δ <sub>λ</sub>			20	30	
Switching times	t <sub>T</sub> (10%...90%)	R <sub>ILED</sub> = 100Ω, T <sub>A</sub> =25°C, Wert <sub>dBm</sub> = 10*log(Wert <sub>meas</sub> /1mW)		14	20	ns
	t <sub>F</sub> (90%...10%)			16	24	
Capacitance	C <sub>S</sub>	f <sub>meas</sub> = 1MHz; V <sub>f</sub> = 0V		52		pF
Temperature coefficient	T <sub>POPT</sub>	LED 10mA-50mA T <sub>POPT</sub> bei T <sub>A</sub> = -40°C bis +25°C		0		%K
		LED 10mA-50mA; T <sub>POPT</sub> bei T <sub>A</sub> = +25°C bis +85°C		-0.4		
	T <sub>VF</sub>			-1.8		mV/K
	T <sub>λ</sub>			0.16		nm/K



# LED 650nm

## 8 Characteristics

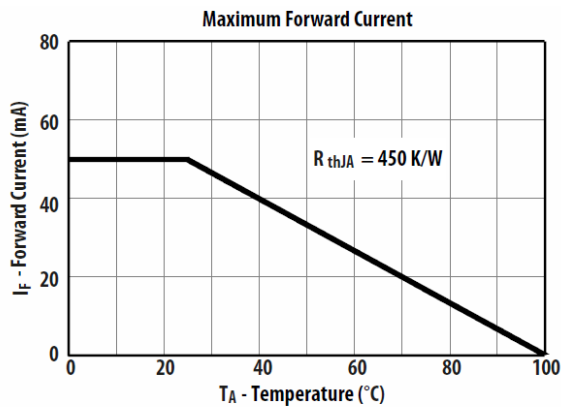


Figure 1. Maximum Forward Current

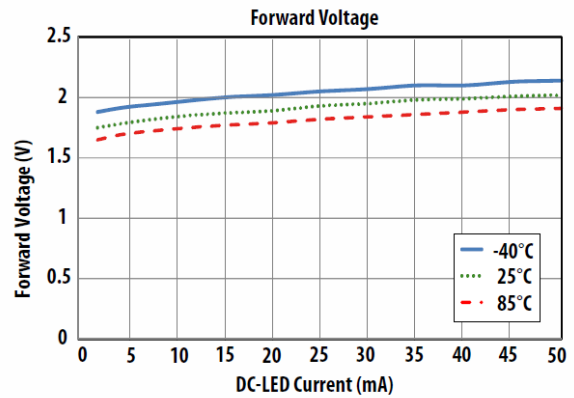


Figure 4. Typical Forward Voltage

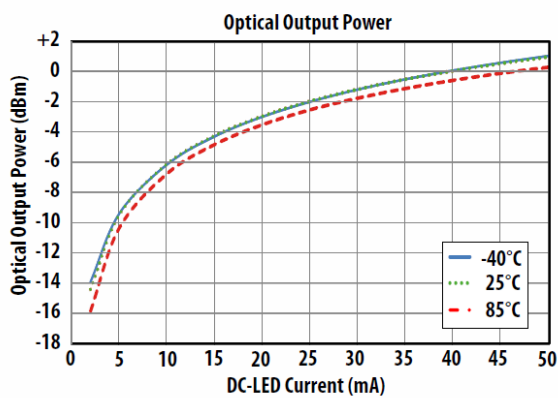


Figure 3. Typical Optical Output Power

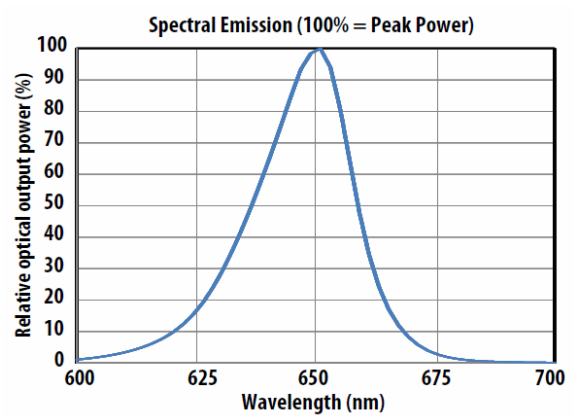


Figure 5. Typical Spectral Emission

The information released by Ratioplast-Optoelectronics GmbH in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Ratioplast-Optoelectronics GmbH for its use. Ratioplast-Optoelectronics GmbH reserves the right to change circuitry and specifications at any time without notification to the customer.