

HSAF16 S IT

- Surge arresters type T3 with high-frequency filters for serial connection.
  - Intended for protection of electronic appliances against the effects of switching, induced and residual overvoltage in insulated power supply systems.
  - Contain an improved thermal fuse, which ensures timely disconnection of HSAF\* S from the power grid during the MOV's overheating and thus prevents damage to the HSAF\* S.
- Installed at the boundaries of LPZ 2 – LPZ 3, as close to the device to be protected as possible (no further than 5 m).
  - In front of HSAF\* S must be installed a lightning current and surge arrester T1 and T2 from HAKEL company.
  - **S** indication specifies a version with remote monitoring.

Type		HSAF16 S IT
Test class according to EN 61643-11:2012 (IEC 61643-11:2011)		T3
System		IT
Number of poles		2
Rated operating AC voltage	$U_N$	230 V
Maximum continuous operating voltage AC	$U_C$	275 V
Rated load current	$I_L$	16 A
Open circuit voltage of the combination wave generator	$U_{OC}$	6 kV
Voltage protection level at $U_{OC}$ (L1/L2)	$U_p$	< 1.4 kV
Voltage protection level at $U_{OC}$ (L1/PE, L2/PE)	$U_p$	< 0.9 kV
Nominal discharge current for class II test (8/20)	$I_n$	3 kA
Total discharge current (8/20) L1+L2->PE	$I_{Total}$	6 kA
Asymmetrical attenuation of filter at $f = 4$ MHz		> 80 dB
Asymmetrical attenuation of filter at $f = 0.15 \div 30$ MHz		> 35 dB
Temporary overvoltage test (TOV) for $t_T = 5$ s (L1/L2)	$U_T$	337 V
Temporary overvoltage test (TOV) for $t_T = 0.2$ s (L1/PE, L2/PE)	$U_T$	1 455 V
Response time (L1/L2)	$t_A$	< 25 ns
Response time (L1/PE, L2/PE)	$t_A$	< 100 ns
Power dissipation	$P_z$	< 3.5 W
Maximal back-up fuse		16 A gL/gG
Lightning protection zone		LPZ 2-3
Housing material		Polyamid PA6, UL94 V-0
Degree of protection		IP20
Operating temperature	$\theta$	-40 ÷ 55 °C
Recommended cross-section of connected conductors	$S$	2.5 mm <sup>2</sup>
Clamp fastening range (solid conductor)		0.2 ÷ 6 mm <sup>2</sup>
Clamp fastening range (stranded conductor)		0.2 ÷ 4 mm <sup>2</sup>
Tightening moment		1,2 Nm
Installation		On DIN rail 35 mm

Type		HSAF16 S IT
Modular width		4 TE
Operating position		Any
Signalling at the device		Optic
Importance of local signaling		OK – red light off FAULT – red light on
Remote signalling		Yes
Potential free signal contact (S) (recommended cross-section of remote monitoring max. 1 mm²)		AC: 250 V / 1.5 A, DC: 250 V / 0.1 A
Includes EMI / EMC filter		Yes
Pluggable version		No
Lifetime		> 100 000 h
Designed according to standards		
Requirements and test methods for SPDs connected to low-voltage power systems		IEC 61643-11:2011
Methods of measurement of the suppression characteristics of passive EMC filtering devices		EN 55017:2011 / CISPR 17:2011
Safety of Flammability of Plastic Materials		UL 94
Application standards		
Protection against lightning		IEC 62305:2010
Selection and erection of electrical equipment – Switchgear and controlgear		HD 60364-5-53:2022
Selection and application principles for SPDs connected to low-voltage power systems		CLC/TS 61643-12:2009
Ordering, packaging and additional data		
Mass	m	180 g
Mass (including the packaging)	m	208 g
Packaging dimensions (H x W x D)		74 x 112 x 73 mm
Packaging value	V	0.61 dm³
ETIM group		EG000021
ETIM class		EC000942
Customs tariff no.		85363010
EAN code		8590681169223
Art. number		30 501




The link in the QR code leads to the online presentation of the **HSAF16 S IT**.  
There, in addition to the always up-to-date data sheet, you will also find all diagrams and drawings, declarations of conformity, or 2D or 3D models and other necessary materials.  
For more information, visit [www.hakel.com](http://www.hakel.com)



8590681169223

Application wiring diagram (installation)

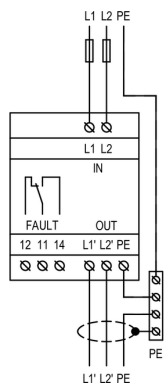

Internal diagram

