


Cabur Solar fuse holder connector



Code	IS43431N
Type	KX04MCHN
HS code	85366990
TECHNICAL FEATURES	
Application	male fuseholder + cable
Connector type	Fuse holder
Max. applicable voltage	1500 Vdc
Max. applicable current	50 A (without fuse)
PIN diameter	4 (mm)
Pliers to use	
PIN material	Tinned Copper
Insulation material	PPE / PA
Contact resistance Rc	< 0.25 (mΩ)
Operating temperature range	-40...+85 (°C)
Protection degree	IP68 (1m, 1h)
Flame class	UL94-V0
Packaging	50 (10 bags for every box, every single bag contains 5 connectors)
ACCESSORIES	
Open-end spanner and unlocking tool	
cod. unlocking tool	IS4SBLOCKN
Quantity / Package	2 pieces
Caps	
Male	IS52400N
Female	—
Operating temperature range	-40...+85
Protection degree	IP68 (1m, 1h)
Flame class	UL94-V0
Quantity / Package	50 pieces
SPARE COMPONENTS	
Plastic shell	
Metallic PIN wound on reel	
APPROVALS AND MARKINGS	

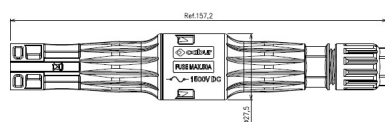

1 (1) Version produced upon request; contact our sales office for availability 2 (2) Sold without fuse.

DESCRIZIONE DEL PRODOTTO

Male Solar fuse holder connector with cable