


1000VDC 16A lockable switch disconnecter

Series	ISSD
Code	ISSD100016S
HS code	85365080
TECHNICAL FEATURES	
Number of poles	2
Utilization category	DC-PV1 / DC-PV2
Rated Insulation Voltage IEC/EN	1000 Vdc
Rated impulse withstand voltage Uimp	8 kV
Continuous current	16 A
Rated short-circuit current Icw	1000 A
Max. power dissipation for poles	0.30 W
Mechanical life	10000 cycles
Nut Cap locking force	1.2 – 1.8 Nm
Cables Section	
Solid Cable	4 – 16 mm ²
Flexible cable	4 – 10 mm ²
Working temperature	-40...+85 °C
Ambient temperature range (storage)	-40...+85°C
Lockable	Yes
Protection degree	IP66
Overvoltage category / pollution degree	II
Standard compliancy	IEC/EN 60947-3:2021
Dimension	94.9×60.2×84.5 mm

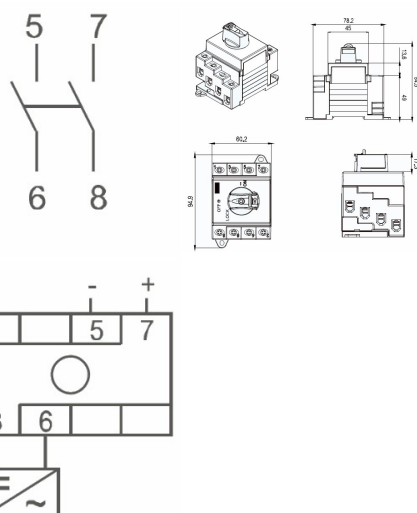

DESCRIZIONE DEL PRODOTTO

1000VDC 16A lockable switch
disconnecter