

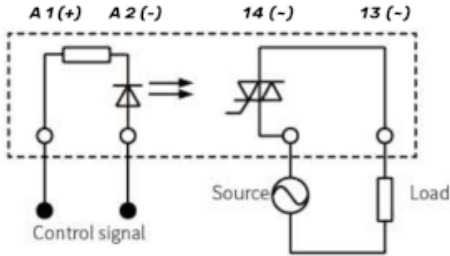


1 solid
state relay 12-24Vdc/230Vac 2A spring, pluggable



Series	CWR
Code	X766832S
Type	
HS code	85364190
INPUT TECHNICAL DATA	
Input rated voltage	24 Vdc ±10%
Pull in / drop out voltage type	19.2 V / 9 V
Current consumption	25 mA ±10% at 24 Vdc
Turn ON / OFF time	8 ms / 5 ms
Protection circuit	Free-wheel diode, Reverse polarity
Connection terminal	2.5 mm ² (spring)
Input channels	1 pluggable
OUTPUT TECHNICAL DATA	
Contact type	zero crossing triac
Output voltage	48...280 Vac
Nominal current	2 A (48...280 Vac)
Connection type	
GENERAL TECHNICAL DATA	
Operating temperature range	-20...+70°C
Input / output isolation	2.5 kVac / 60 s
Protection degree	IP 20
Overvoltage category / pollution degree	II / 2
Status indication	LED "Input"
Housing material	UL94V-0 plastic material
Dimensions (LxHxD)	6.2x89x77 mm
Approximate weight	35 g
Continuous current	80 A for 10 ms
Mounting information	on a rail, side by side
Leakage current with signal 0	1.5 mA
Min applicable load	0.1 A
ACCESSORIES	
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Marking tag	NUPUTUK50
Plug-in jumper	CWBK7-0813 (20 poles)
APPROVALS AND MARKINGS	CE, 



* Pluggable relay* DC input voltage* Suitable for AC Load* Compact dimensions* Available plug-in jumper for potential distribution* with spring connection
1 Manufacturer and model of the relay is not binding, technical data are to be considered typical

DESCRIZIONE DEL PRODOTTO

CWS-024DC/230AC/02 1 solid state relay 12-24Vdc/230Vac 2A
spring, pluggable